
D90661G

Installation of Racks Standard Guide Rails

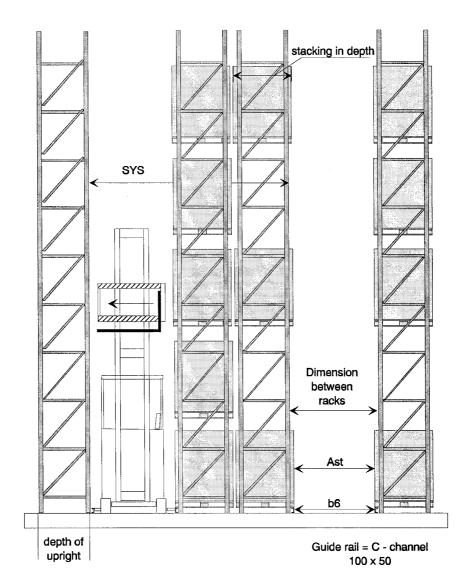

High Bay Warehouse System Sketch / Minimum requirements

Client:			
Ast	= aisle width = width between pallets	= m	nm
b6	= width betw. guide rails	= m	ım
Load size	=	x m	nm
Stacking	in depth	= m	nm
SYS (syste	m width) = Ast + 2x stacking in depth + 100 mm)	= m	nm
Dist. betw	veen racks = Ast + stacking in depth - depth of upright	= m	nm

DEUTRUCK GmbH Fördertechnik